


Phosphor
Bronze

Flush Head

Broaching Stud

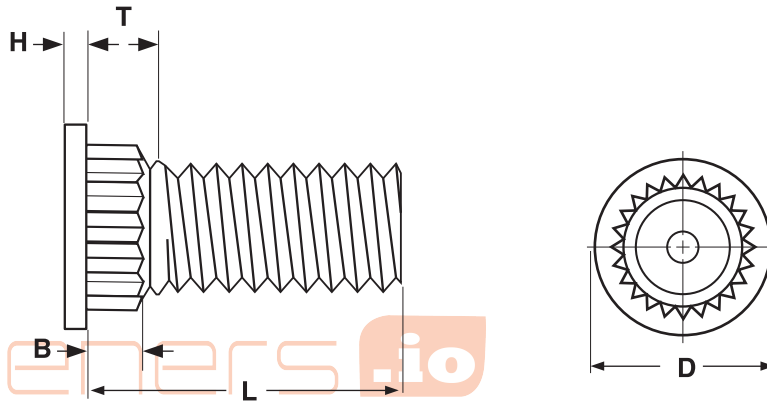

BROACHING TYPE STUDS

PEM®

Thread Size	D		H		B	T	Sheet Thickness	Hole Size in Sheet		Clearance Hole size in Attached Parts	Distance from Hole Center to Edge
	Head Diameter		Head Height		Shank	Distance to first full form thread					
	Max	Min	Max	Min	Max	Max		Min	Max		
4-40	.190	.170	.025	.015	.065	.09	.060	.123	.120	.145	.15
6-32	.210	.190	.025	.015	.065	.09	.060	.143	.140	.170	.19
8-32	.235	.215	.025	.015	.065	.09	.060	.169	.166	.195	.20
10-32	.260	.240	.025	.015	.065	.09	.060	.192	.189	.220	.20
Tolerance on Length					± .010						

Description	An externally threaded fastener with unified thread pitch and a circular, low-profile head. Directly below the head is a shoulder with a series of ribs that extend vertically from the head to above the first full form thread. The diameter of the ribbed area is greater than the major diameter of the threaded shank.
Applications/ Advantages	Designed for use in personal computer boards as either (a) a permanently affixed mechanical fastener that holds its place, or (b) as a connector that can be soldered.
Material	CDA 510 Phosphor Bronze
For use in...	...materials with a hardness of Rockwell B-65 or less.
Installation Force	400 lbs. (all diameters)
Nut Tightening Torque (Max.)	4-40: 4 in. lbs.; 6-32: 8 in. lbs.; 8-32: 15 in. lbs.; 10-32: 18 in. lbs.
Pushout	4-40: 65 lbs.; 6-32: 70 lbs.; 8-32: 80 lbs.; 10-32: 90 lbs.
Torque Out	4-40: 7 in. lbs.; 6-32: 11 in. lbs.; 8-32: 16 in. lbs.; 10-32: 17 in. lbs.
Plating	Electro-tin plated